

65 Way PCB Edge Connector

From: **82E338 External Monitoring Selectors**

To: **SL 651 Master Module**

Note: **These connections on component side of board**

1	Not Used	34	Stereo Cues Lamp
2	Not Used	35	Aux 2 Lamp
3	Not Used	36	Stereo 3 Lamp
4	Not Used	37	Aux 3 Lamp
5	Not Used	38	Keyway
6	Not Used	39	Aux 4 Lamp
7	Not Used	40	Stereo 1 Lamp
8	Not Used	41	Stereo 5 Lamp
9	Not Used	42	Quad Disc Lamp
10	Not Used	43	Stereo 4 Lamp
11	Not Used	44	Quad 1 Lamp
12	Not Used	45	Stereo 2 Lamp
13	Not Used	46	Quad 2 Lamp <i>or</i> QB to SLS Lamp
14	Not Used	47	Spare
15	Not Used	48	Not Used
16	Not Used	49	Not Used
17	Not Used	50	Not Used
18	Not Used	51	Not Used
19	Not Used	52	Not Used
20	Not Used	53	Enable from EXTERNAL TO MONITORS/SLS switch
21	Not Used	54	Not Used
22	Not Used	55	Not Used
23	Not Used	56	Not Used
24	Not Used	57	Not Used
25	Not Used	58	Not Used
26	Not Used	59	Not Used
27	Not Used	60	+11v
28	Not Used	61	Not Used
29	Not Used	62	Not Used
30	Not Used	63	Not Used
31	Not Used	64	Not Used
32	Not Used	65	Not Used
33	Aux 1 Lamp		


65 Way PCB Edge Connector

From: **82E338 External Monitoring Selectors**

To: **SL 651 Master Module**

Note: **These connections on reverse side of board**


1	RB Output	34	Quad 1 RB Input
2	LB Output	35	Quad Disc RB Input
3	Quad Disc LB Input	36	Spare
4	Quad 1 LB Input	37	Spare
5	Quad 2 LB Input	38	Keyway
6	Quad 2 RF Input	39	Not Used
7	Quad 1 RF Input	40	Not Used
8	Quad Disc RF Input	41	Not Used
9	Stereo 5 R Input	42	Not Used
10	Stereo 4 R Input	43	Not Used
11	Stereo 3 R Input	44	Spare
12	Stereo 2 R Input	45	Spare
13	Stereo 1 R Input	46	SL 4000 To 82E25 +Ve for QUAD SL 6000 To 82E154 -Ve for MONO
14	RF Output	47	Aux 3 Switch
15	Stereo Cue R Input	48	Aux 4 Switch
16	Aux 1 Input	49	Stereo 1 Switch
17	Aux 2 Input	50	Stereo 2 Switch
18	Aux 3 Input	51	Aux 2 Switch
19	Aux 4 Input	52	Aux 1 Switch
20	Not Used	53	Stereo Cues Switch
21	Not Used	54	Quad 1 Switch
22	Not Used	55	Quad 2 Switch <i>or</i> QB to SLS Switch
23	Stereo Cue L Input	56	Quad Disc Switch
24	LF Output	57	Stereo 5 Switch
25	Stereo 1 L Input	58	Stereo 4 Switch
26	Stereo 2 L Input	59	Stereo 3 Switch
27	Stereo 3 L Input	60	+11v
28	Stereo 4 L Input	61	+18v
29	Stereo 5 L Input	62	-18v
30	Quad Disc LF Input	63	0v
31	Quad 1 LF Input	64	0v
32	Quad 2 LF Input	65	0v
33	Quad 2 RB Input		

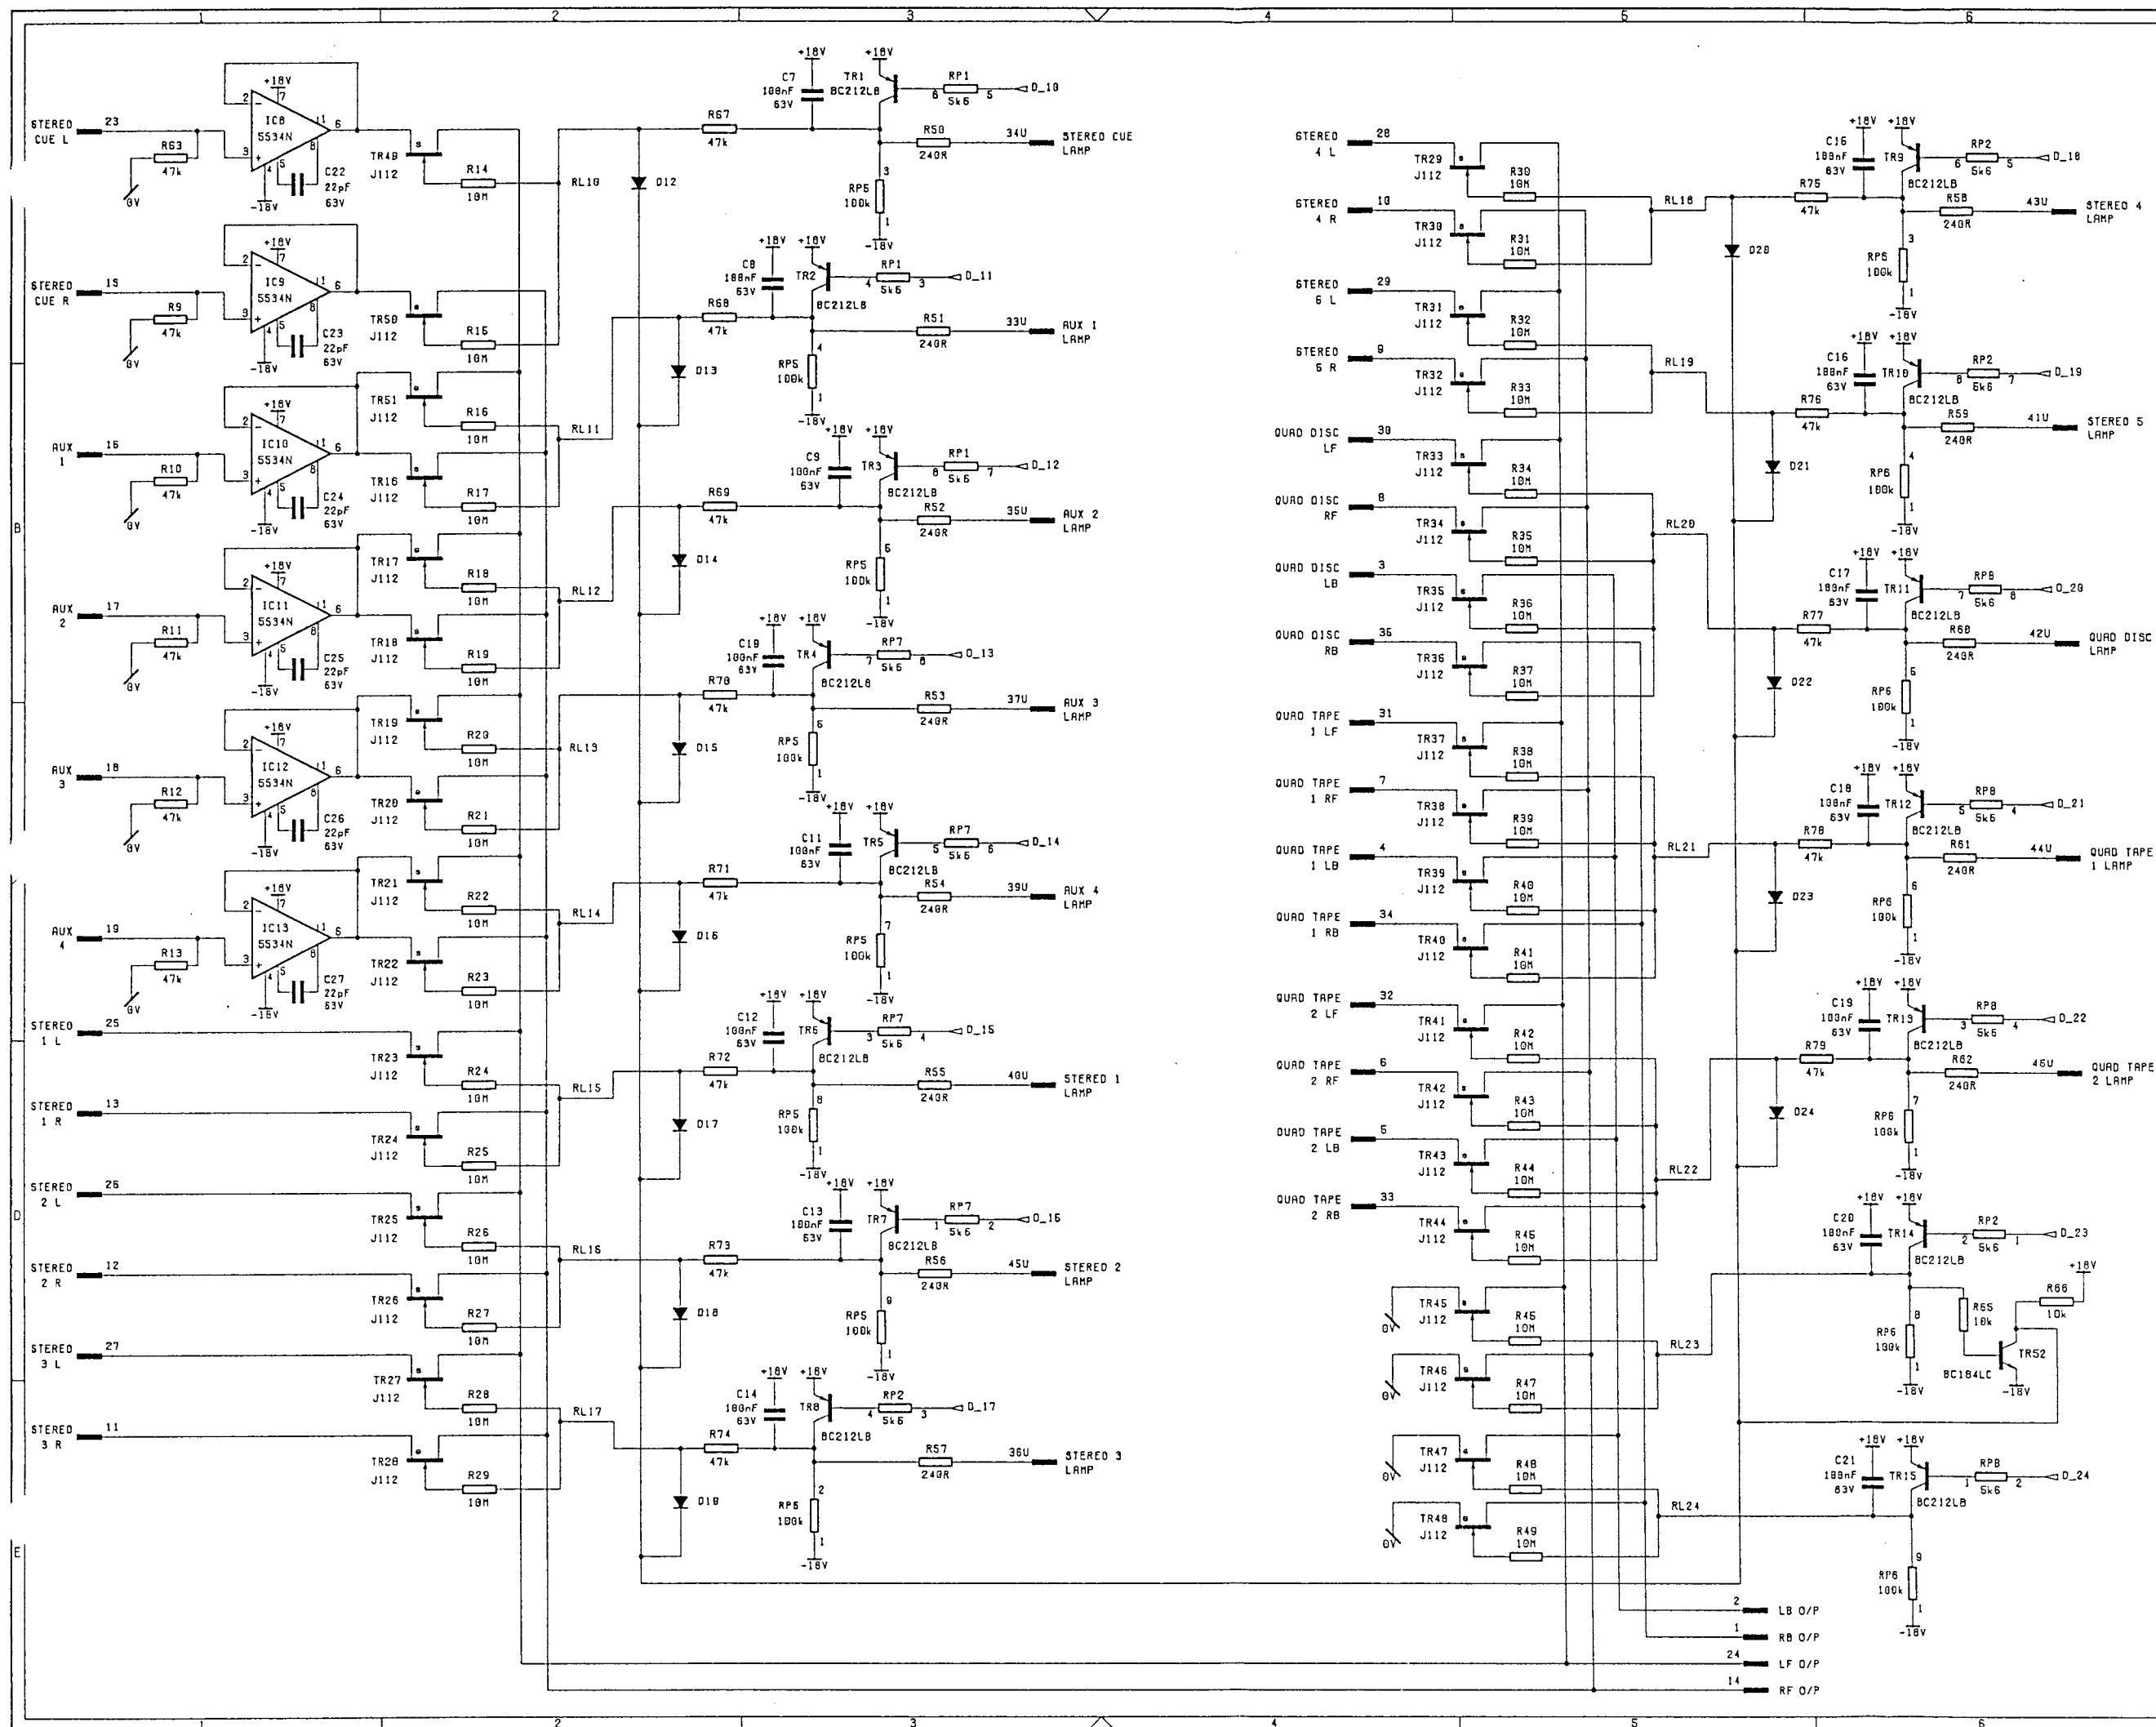

COPYRIGHT © SSL ALL RIGHTS RESERVED. THIS DOCUMENT MAY NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF SOLID STATE LOGIC.				
REV	ISS	DATE	DETAILS	
0	A	24 APR 89	NEW DRAWING	STEFF
1	A	8 OCT 90	ECO 4K/484 NO CHANGE	MM
2	A	8 NOV 91	ECO 4K/665 NO CHANGE	MM
3	A	8 NOV 91	ECO 4K/885 NO CHANGE	MM
PCB ISSUE CD				
USED ON		SL651G	A2	
TITLE				
EXT MON SELECTORS				
DRG.NO.				
T82338.71				
SHEET 1 OF 2				
Solid State Logic				

COPYRIGHT © SSL ALL RIGHTS RESERVED.
THIS DOCUMENT MAY NOT BE REPRODUCED
IN ANY FORM WITHOUT THE WRITTEN
PERMISSION OF SOLID STATE LOGIC.

REV	ISS	DATE	DETAILS
0	A	24 APR 89	NEW DRAWING STEFF
1	A	8 OCT 90	ECO 4K/484 R4 WAS 10K MM
2	A	8 NOV 91	ECO 4K/665 LK4 WAS A NOW B MM
3	A	8 NOV 91	ECO 4K/885 C6 WAS 10NF NOW NOT FITTED MM

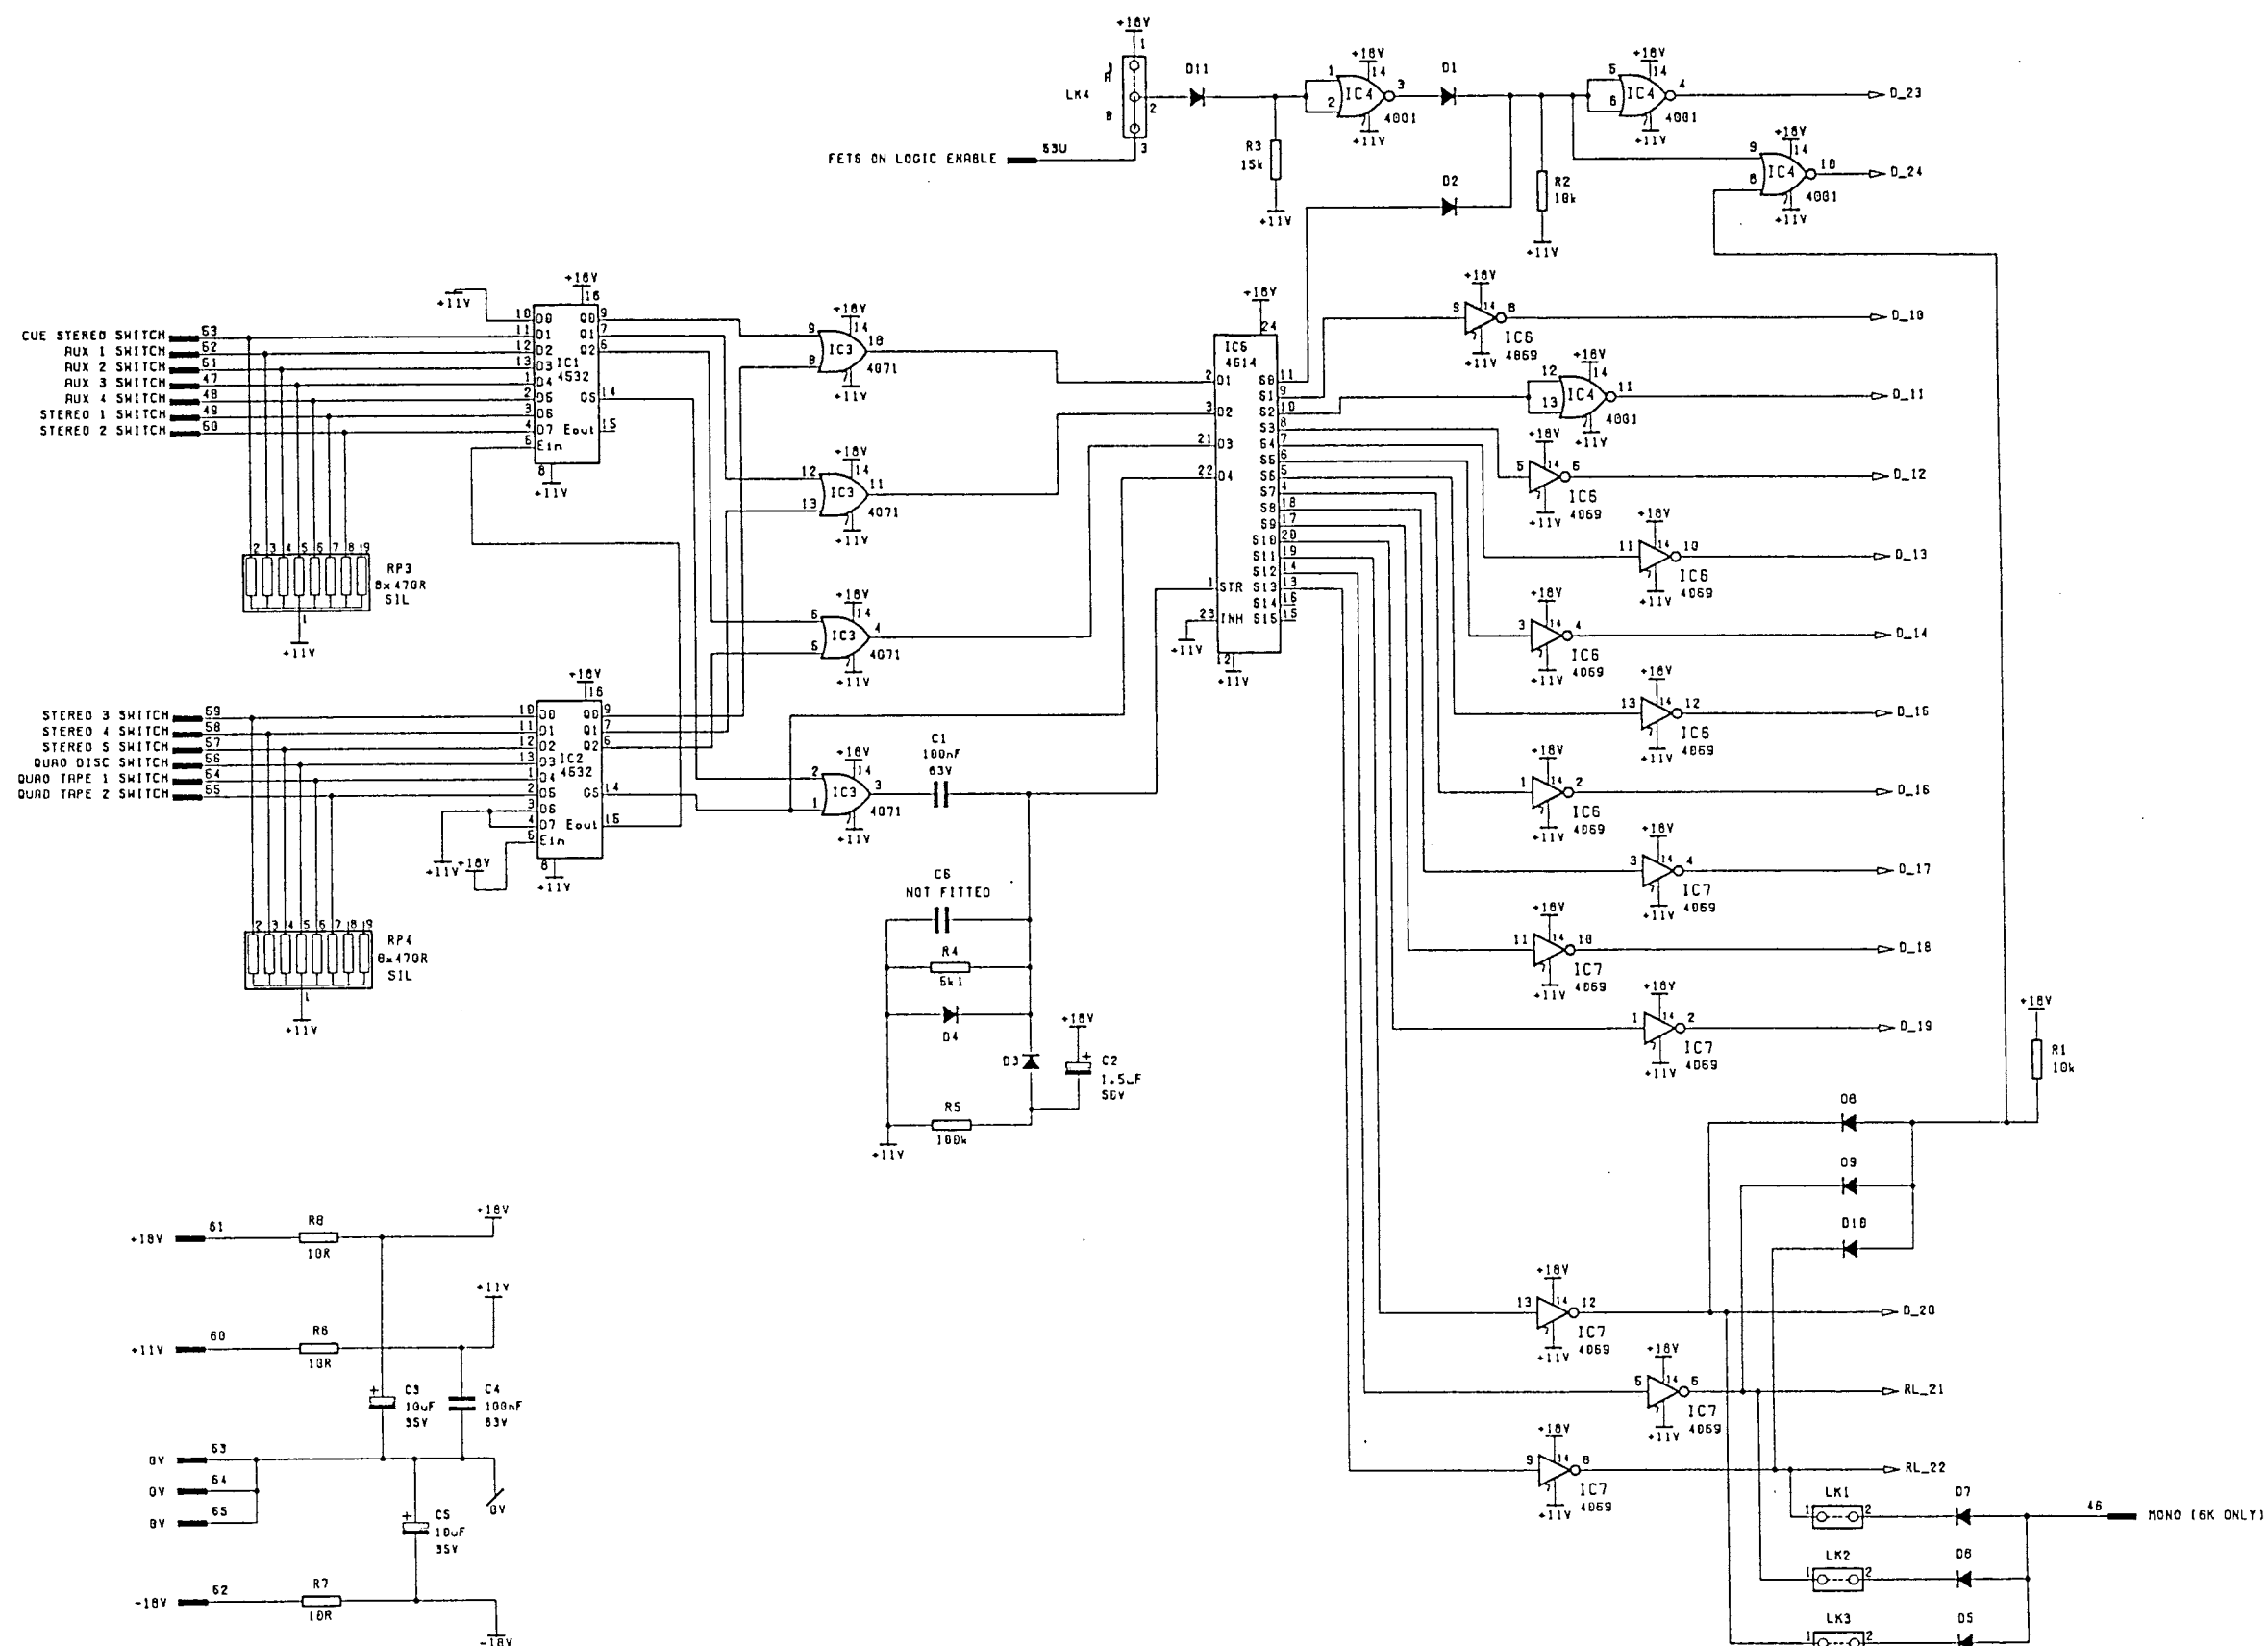

PCB ISSUE CD

USED ON SL651G A2

TITLE
EXT MON SELECTORS

ORG.NO. T82338.72
SHEET 2 OF 2

Solid State Logic